


# Layout drawing

Machine area make room for 1 m!

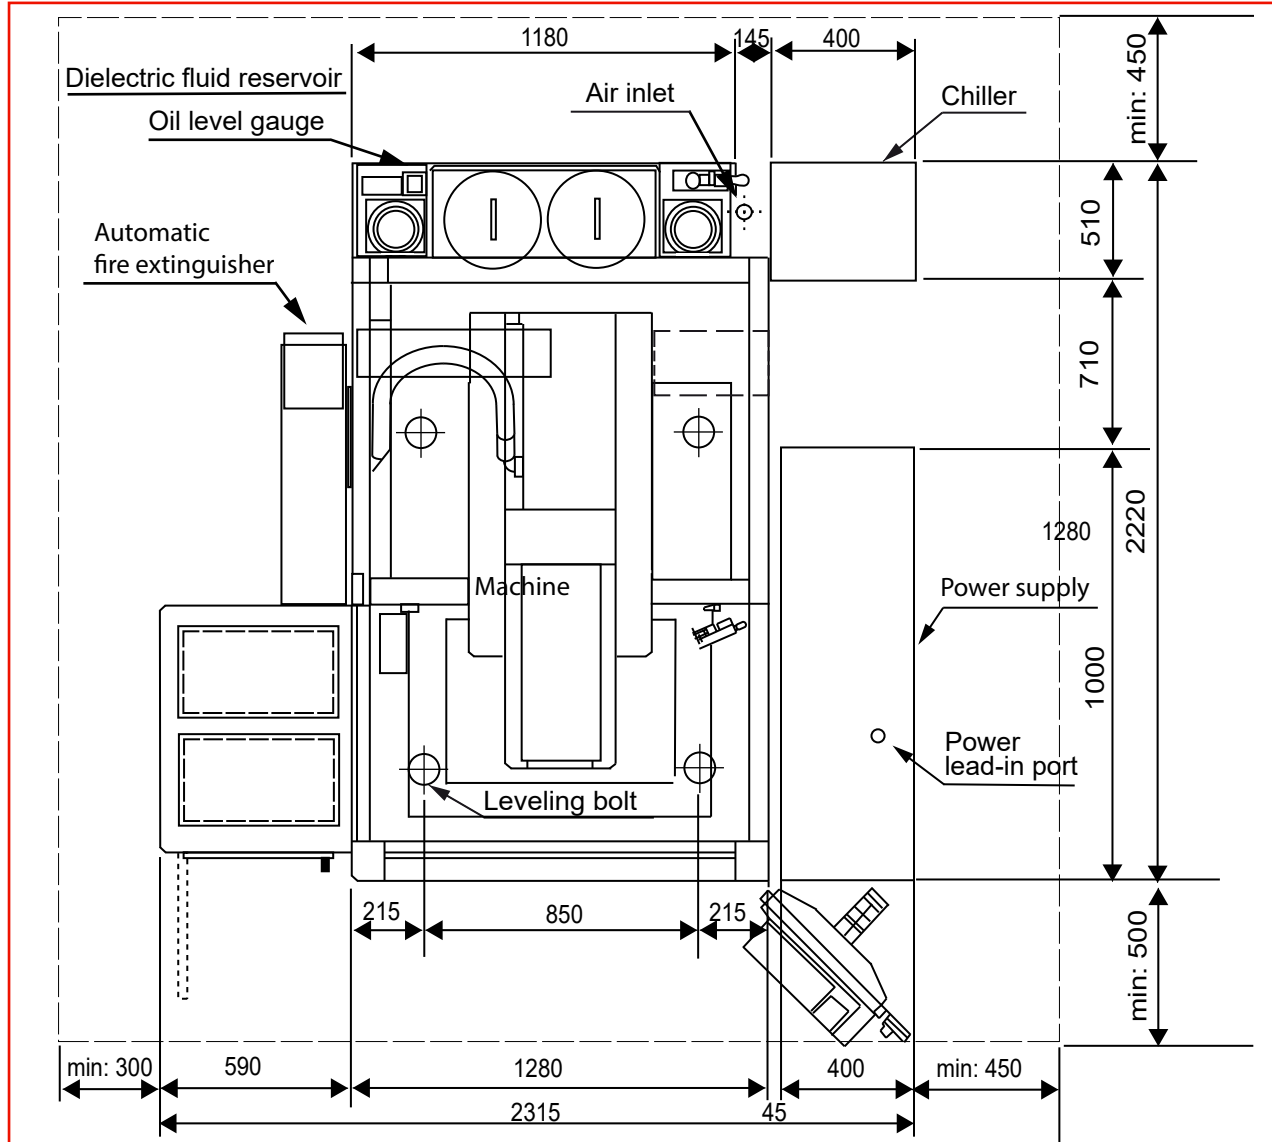

## Additional information

Weight of machine body: 3.100 kg  
 Weight of power supply unit: 315 kg  
 Height of machine: 2.400 mm  
 (with leveling bolt & exhaust. duct.)

Requested minimum measurement for entrance door/gate (WxH) with LS20T-ATC: 1.915 x 2.500 mm

- 1: Power supply  
 3 phases 400 V / AC, PE  
 $\pm 10\%$ , 50/60 Hz, 20 kVA
- 2: Pneumatic connection: 5-7 kgf/cm<sup>3</sup> » 500-700 kpa  
 Air volume minimum: 27 l/min  
 3/8" hose connection
- 3: For a fire extinguish installation a fixed connection in the near of the control unit is necessary. A socket is not allowed.  
 1 phase AC 240 V with 10 A fuse.
- 4: Network connection
- 5: The erosion system should be set up to preferably consolidated concrete floors on a suitable hard industrial ground. To the capacity of MITSUBISHI possibly necessarily becoming shielding measures do not belong in accordance with EMV guideline.

